

1.5W-10W ABS Wall Mount Speaker HYU-PA-SWM001




Key Features

- 70/100V, 1.5-10W with multiple terminals
- Max SPL: 100±2Db
- High sensitivity: 92±2dB
- Effective Freq:160Hz-18kHz
- Made of high-quality engineering plastic

Specifications

| Model | HYU-PA-SWM001 |
|---------------------------|---------------|
| Speaker Unit | 6.5"x1, 2"x1 |
| Rated Power | 10W |
| Line Voltage | 70V/100V |
| Sensitivity (1m, 1W) | 92 ± 2dB |
| MAX. SPL. (1m) | 100 ± 2dB |
| Effective Frequency Range | 160Hz-18kHz |
| Weight | 1.75kg |

Dimensions and Installation

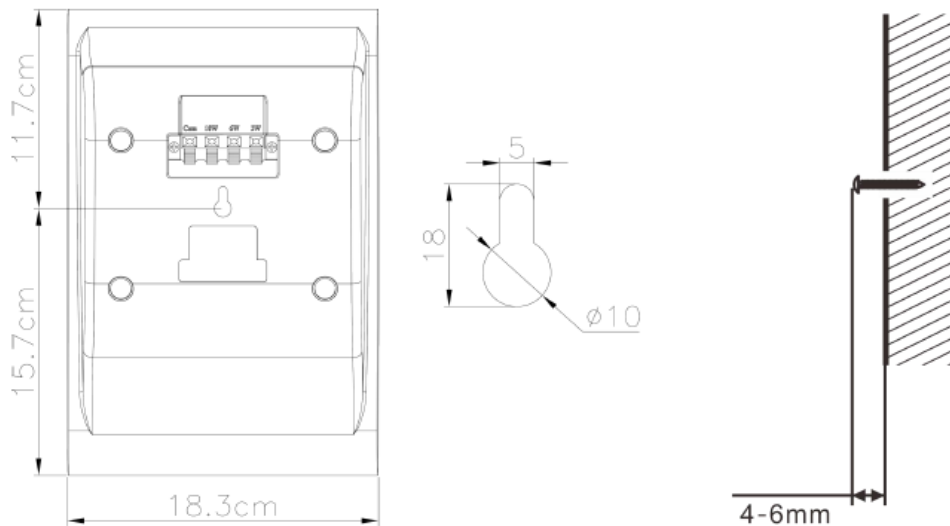

1. Install a nail with a diameter of 4mm on the wall where the speaker needs to be installed, and leave a distance of 4-6mm between the nail cap and the wall (see the figure above).
2. Connect the audio broadcast transmission line, and select the appropriate terminal for connection based on the actual power requirements according to the following table.