


43" (4K) Professional LED Monitor

HYU-CC-MM43002

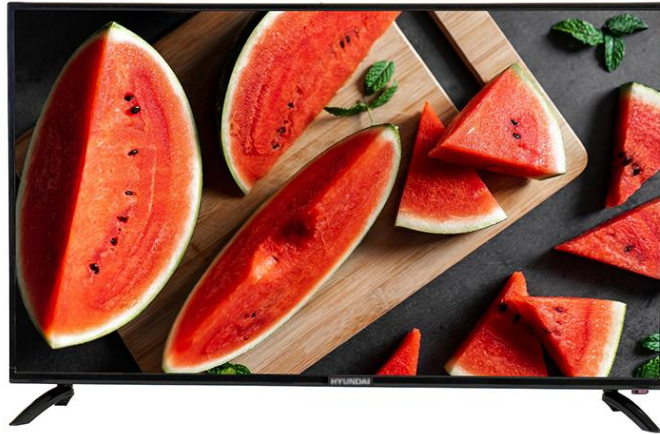

Key Features

- HD: 3840*2160, 4 times higher than normal monitor
- Turn on the screen to automatically detect the resolution of the input signal in the upper right corner of the screen
- Clear: delicate and realistic, conveying true colors, showing the true colors
- Bright: The quality is improved, only for better presentation
- Adopt industrial screen, high brightness, high contrast
- High-precision standard regulated power supply, specially designed for industrial equipment, supporting 24 hours × 365 days of uninterrupted work
- It adopts full metal casing, strong structure, fireproof, moisture proof and shockproof, especially suitable for equipment that is susceptible to electromagnetic interference
- Adopt 10bit image chip processing technology, high pixel progressive scan, fine texture
- Support intelligent 3D noise reduction, eliminate afterimage function, dynamic brightness, contrast color optimization technology
- Apply the world's leading LED driver solution to accurately restore the front-end signal, with a strong sense of reality
- LED has small volume, low energy consumption, zero radiation, stable image, no impact on the eyes, natural health
- 6.5 ms extremely fast response, avoiding the tailing phenomenon of images in high speed operation
- Using nanotechnology, the picture is more three-dimensional, transparent
- This machine also comes with a splicing function, no external splicer

Specifications

Model	HYU-CC-MM43002
Display	
Product Type	Professional Monitor
Screen Size	43"
Screen Type	LED
Screen Ratio	16:9
Brightness	400nit
Contrast Ratio	5000:1
Response Time	6.5ms
Visual Area	941.184 (H) x 529.416 (V) mm
Display Color	1.07B
Viewing Angle	wide
Clearness	3840*2160
Control method	Panel infrared
Interface	
Input port	HDMI*2, VGA*1, USB*1, DVI*1, AV*1 232 *1
Output port	232*2
Audio	
Audio Output	2*Stereo speakers
General	
Power Supply	110-220V/0.7A
Power frequency	50-60Hz
Total Power	75W
Casing	professional fireproof iron shell, plastic frame (plastic base)
Dimensions	966mm*563mm*83mm, not including the foot height (foot height 46mm)
Packing Size	1000mm *625mm *110mm
Installation method	Base, wall mount
Product Weight	7.3kg
Gross Weight	9kg
Working environment temperature	0°C ~ 50°C
Working environment humidity	10% - 90%RH
Storage temperature	-20°C - 60°C
Packing size (2pcs in 1 case)	1060mm*675mm*270mm
Gross Weight	20kg

Dimensions

