

# 5MP HD Color Night Fixed Bullet Network Camera

## HYU-CC-CIBF25001



### Key Features




- High quality image with 5MP, 1/2.7" CMOS sensor
- 5MP (2880\*1620)@30/25fps; 4MP (2560\*1440)@30/25fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Color Night technology ensures 24-hour full-color images
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 corridor Mode
- Alarm: 1 in/1 out, Audio: 1 in/1 out
- Supports 256Gb Micro SD card
- IP67 protection
- IK10 vandal resistant
- Support PoE power supply

### Specifications

Model	HYU-CC-CIBF25001			
<b>Camera</b>				
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS			
Minimum Illumination	Color: 0.001Lux (F1.0, AGC ON) 0 Lux with IR			
Day/Night	IR-cut filter with auto switch (ICR)			
Shutter	Auto/Manual, 1 ~1/100000s			
Adjustment Angle	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°			
S/N	>56dB			
WDR	120dB			
<b>Lens</b>				
Lens Type	4.0mm @1.6, Fixed-focal			
Lens Mount	M12			
Angle of View (H)	80.2°			
Angle of View (V)	43.0°			
Angle of View (O)	94.7°			
<b>DORI</b>				
DORI Distance	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	90.0	36.0	18.0	9.0
<b>LED Illuminator</b>				
LEDs Number	2			
LED Distance	Up to 30m (98ft)			
<b>Video</b>				
Video Compression	Ultra 265, H.265, H.264, MJPEG			
H.264 code profile	Baseline profile, Main profile, High profile			
Frame Rate	Main Stream: 5MP (2880*1620), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 2MP (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;			
Video Bit Rate	128kbps ~ 16Mbps			
9:16 Corridor Mode	Supported			
OSD	Up to 4 OSDs			
Privacy Mask	Up to 4 areas			
ROI	Up to 8 areas			
<b>Image</b>				
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2			
Digital Noise Reduction	2D/3D DNR			
Smart Illumination	Supported			
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise			
De-warping	N/A			
HLC	Supported			
BLC	Supported			
Defog	Digital Defog			

Audio	
Audio Compression	G.711
Two-way audio	Supported
Suppression	Supported
Sampling Rate	8kHz
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS (NFS)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, SNMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK
Client	GuardStation, Guardview
Interface	
Network	1 * RJ45 10M/100M Base-TX Ethernet
Alarm I/O	1/1
Audio I/O	Input: impedance 35k $\Omega$ ; amplitude 2V [p-p] Output: impedance 600 $\Omega$ ; amplitude 2V [p-p]
General	
Power	DC 12V $\pm$ 25%, PoE (IEEE 802.3af) Power consumption: Max 9.0W
Dimensions (L x W x H)	246 x 86 x 85mm (9.7" x 3.4" x 3.3")
Weight	0.92kg (2.02lb)
Material	Metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: $\leq$ 95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: $\leq$ 95% RH (non-condensing)
Surge Protection	4KV
Reset Button	N/A
Ingress Protection	IP67
Vandal Resistance	IK10

### Dimensions

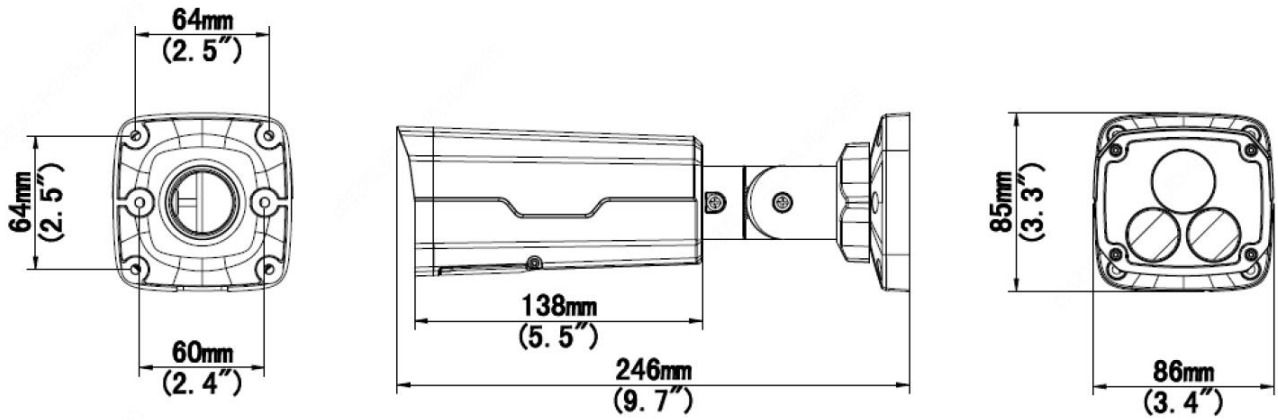

### Accessories

HYU-CC-AUP06B



HYU-CC-AUP06C



HYU-CC-AJB07D



HYU-CC-AJB06A

