



User Manual

Wireless relay module BP-WRM01-868



For Inquiries, Please contact:

Security Shop
Vladimira Popovica 6/6/A606
11070 Novi Beograd, Serbia
Tell: +381 11 318 68 68
office@securityshop.rs

Imported/Distributed by Security Shop doo
license of Blaupunkt
www.blaupunkt.com
Made in China


Enjoy it.

1. Introduction

- * Heartbeat online inspection
- * Add device code to mobile app for management
- * 3CH non-coordinated control
- * Output polarity is optional
- * Remote control

DIP Switch


DIP switch with N/O, N/C mode, default setting is N/O mode (CH1, CH, CH3).

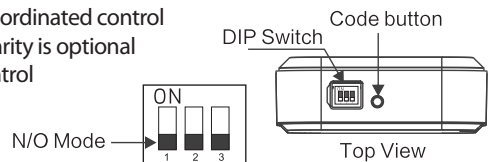

Code position	Status	
	OFF	ON
1	CH1 N/O Output	CH1 N/C Output
2	CH2 N/O Output	CH2 N/C Output
3	CH3 N/O Output	CH3 N/C Output

Wiring Method


Please refer to blew wiring schematic diagram (example)

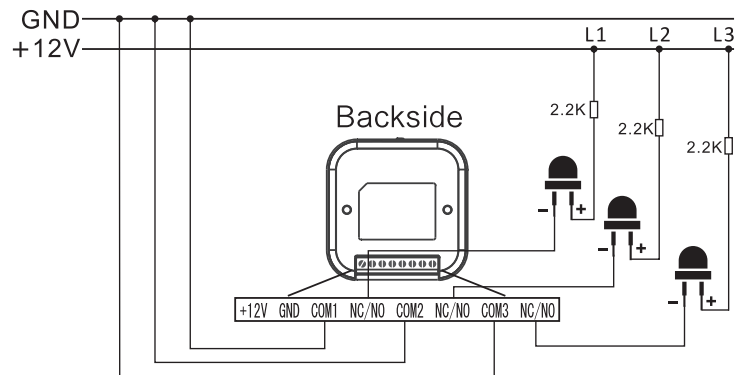

Port	Icon	Meaning	Channel
1	DC12V+	External Access	Power
2	GND	GND Connection	Com. GND
3	NC/NO	NC. NO.	Output 1
4	COM1	COM.	CH1
5	NC/NO	NC. NO.	Output 2
6	COM2	COM.	CH2
7	NC/NO	NC. NO.	Output 3
8	COM3	COM.	CH3

2. LED Indication

Blue: Channel Output Disconnect
Red: Channel Output Connect



3. Technical Parameter

Model: BP-WRM01-868
 Working Voltage: DC 12V
 Working Current: <200mA@Max
 Relay output power: 10A/14VDC
 10A/125VAC
 Debug Mode: ASK/FSK For options
 Working Frequency: 433MHz
 Wireless Distance: ≤100M (in the open area)
 Product Size: (L * W * H) 70 * 70 * 25mm
 Installation: Wall inside, wall mounting

4. Add Device

The FSK control box is added as a device to the host or mobile APP, and the ASK control box needs to add 3 channels in sequence. Users please add as follows:

1 pair of code added:

FSK -- Set the host or mobile phone APP in the device addition state, press the code key once with an object similar to the thimble. At this time, the switch controller sends a signal to the host/mobile APP to enter the network.

ASK -- Set the host or mobile APP in the device and state, please follow the steps below:

- Press and hold the code button for 2 seconds, and the red light of CH1 will be on and then released.
- Press again to release, the switch controller sends a signal to the host/mobile APP to enter the network;
- Repeat the above steps to complete the addition of channel 2 and channel 3.

2 scan code QR code added: Users can also add equipment by scanning the QR code on the back of the switch controller.

3 Manually enter the address code to add: Set the host or mobile phone APP to the device addition state, and manually input the 9-digit address code on the back of the switch controller to add. For details, see the host manual.

After the network is successfully connected, the switch control can realize the remote operation to open or close the switch.