

User Manual

Wireless to wired module BP-WTW08Z-868



Enjoy it.

1. Introdunct

BP-WTW08Z-868 repeater convert wireless signal to wired signal and it can convert signal for max 8 wireless device. Please code the wireless device to the repeater before using.




Appearance

2. Specification

- 2.1 can code max 8 wireless device.
- 2.2 wireless signal frequency: 433MHz / 868MHz
- 2.3 work voltage: 11.5 - 15.5V
- 2.4 work current: 33-39mA


3. Installation

- 3.1 Open the cover;
- 3.2 Remove the PCB;
- 3.3 Put the base cover on the wall and point out where to drill hole for screw;
- 3.4 Remove the base cover and drill hole on the wall;
- 3.5 Put the base cover to the wall, let the wire of the device which will connect to the repeater through the wire outlet hole and connect it to the repeater;
- 3.6 Fix the base cover on the wall by screw in screws;
- 3.7 Install the PCB back;
- 3.8 Cover the face case.

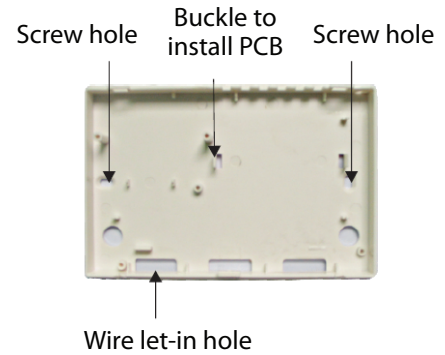

4. Coding and delete coding

- 4.1 Coding wireless device: Connect the power, press the switch of each zone, then trigger the wireless device, the LED according to the zone will light-off for 5 seconds. Then coding successfully.
Eg, coding the wireless device to thr NO.1 zone, press the NO 1 switch, then trigger the wireless device, the red No. 1 LED will be off for 5 seconds, then coding cuccessfully.
- 4.2 Delete coding: If need to recoding another wireless device to a zone which had coded with a wireless device alrely. You need to delete the coding first. Operate as below: press and hold the switch of the zone which you wan to delete coding and press (CLR) switch, the yellow LED will normaly on, then delete successfully.

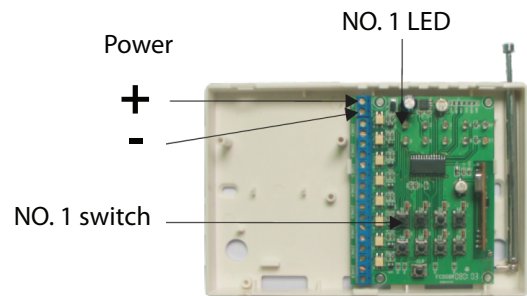

5. Transmiting wireless signal

Trigger the wireless device which had coded to the repeater, the LED of the zone will l light-off for 5 seconds, and the relay output terminal of the zone will open for 5 seconds. Eg. a wireless detector has coded to NO 3 zone, when trigger the detector, NO. 3 LED will turn off for 5 seconds, the wired output terminal will open for 5 seconds.

For Inquiries, Please contact:

Security Shop
Vladimira Popovica 6/6/A606
11070 Novi Beograd, Serbia
Tell: +381 11 318 68 68
office@securityshop.rs

Imported/Distributed by Security Shop doo
license of Blaupunkt
www.blaupunkt.com
Made in China