Product Datasheet

7-Inch Indoor Video Monitor

BP-VDP-IS748-B



Specifications


- 7-inch capacitive touch display with 800 x 480 resolution
- IP video intercom based on the TCP/IP protocol
- Operating power: 24 V DC; compatible 24 V non-standard PoE input
- Quiescent current: ≤ 80 mA; operating current: ≤ 200 mA
- Call waiting: 30 s; call duration: 120 s; monitoring: 30 s
- Eight I/O defense zone inputs; Z8 defaults to doorbell input
- Video monitoring of outdoor/gate stations and IP cameras
- Two-way intercom, door unlocking, call history and snapshot capture
- Management-center messages, SOS and arm/disarm functions
- Multi-monitor apartment operation; optional elevator reservation
- Operating temperature: -10 °C to +55 °C
- Overall dimensions: 182 x 119 x 15 mm

BLAUPUNKT


Product Datasheet

Dimensions


Product type	7-inch wall-mounted indoor video monitor
Display	7-inch capacitive touch; 800 x 480 px
Width	182 mm
Height	119 mm
Depth (parameter table)	15 mm

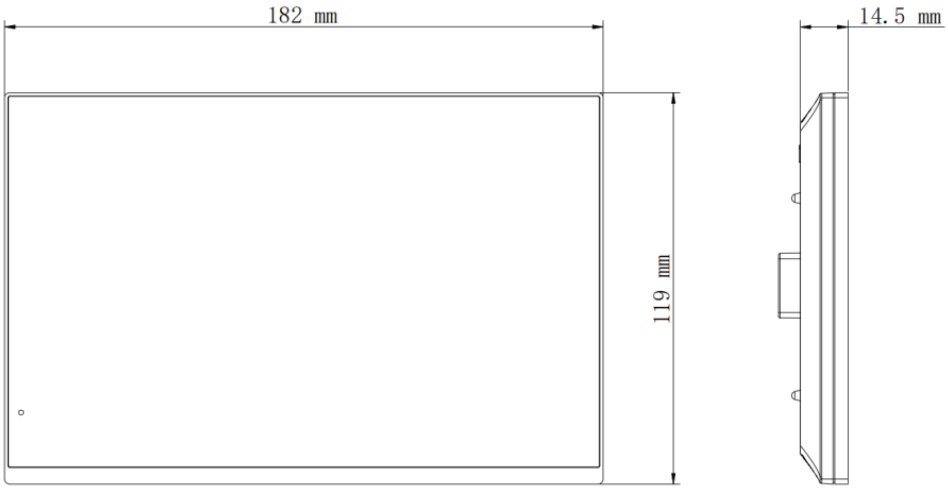

Connection Interfaces

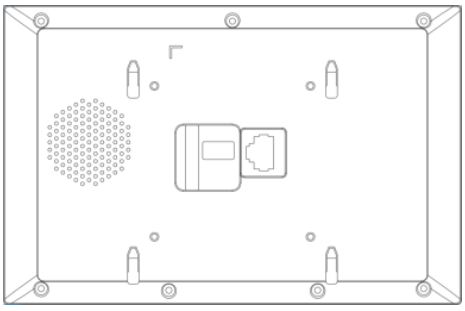


Rear housing

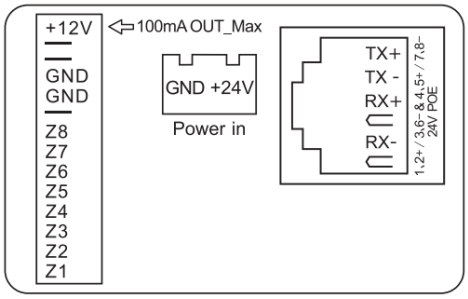


Terminal and network ports

Interfaces: 12 V detector supply (up to 100 mA, model-dependent), Z1-Z8 security inputs, 24 V DC power and Ethernet / compatible 24 V non-standard PoE.


Wall Mounting

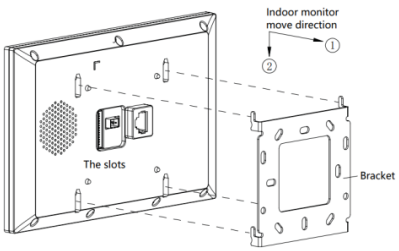

1. Rear bracket

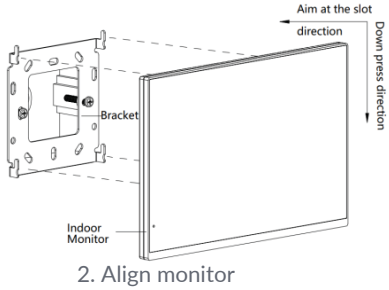

2. Align monitor

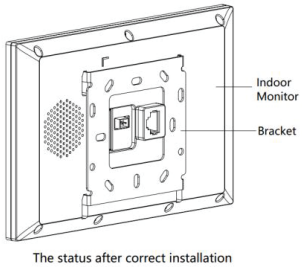

3. Mounted position

Manual note: dimension drawing labels 14.5 mm depth; parameter table states 15 mm.