

NETWORK VIDEO RECORDER

HYU-CC-RH216003



Key Features


- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output, HDMI at up to 4K (3840 x 2160) resolution
- Long transmission distance over coaxial cable

Specifications

Model	HYU-CC-RH216003
Video/Audio Input	
Analog Video Input	4-ch, BNC
IP Video Input	2-ch (only IP up to 6ch), each channel up to 4K
Supported Analog Camera Types	<p>Support AHD input: 8MP@15fps (channel1) 5MP@20fps 4MP@30fps 3MP@30fps(channel1) 1080P@30fps 720P@60fps</p> <p>Support TVI input: 8MP@15fps(channel1) 5MP@20fps 4MP@30fps 3MP@20fps (channel1) 1080P@30fps 720P@60fps</p> <p>Support CVI input: 8MP@15fps(channel1) 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps</p> <p>Support CVBS input</p>
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	3840 x 2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	4-ch
Network	
Incoming Bandwidth	48Mbps
Outgoing Bandwidth	60Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Encoding	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /1080P/960P/720P/960H/D1/4CIF/CIF
Recording Frame Rate	<p>Main stream: 8MP Lite@8fps(channel1) 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps(channel1) 1080P@15fps 720P@30fps</p> <p>Sub stream: D1@12fps (Max)</p>

Hard Disk	
SATA	1 SATA interface
Capacity	Up to 6TB for each disk
Smart	
VCA Detection	1-ch Intrusion detection and cross line detection on analog camera
VCA Search	Behaviour search on analog camera
External Interface	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Serial Interface	1 x RS485
General	
Power Supply	12V DC Power Consumption: ≤8 W (without HDD)
Dimensions (W×D×H)	260mm × 240mm × 46mm (10.2" × 9.4"× 1.8")
Weight (without HDD)	≤1.1kg (2.42lb)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)

Dimensions

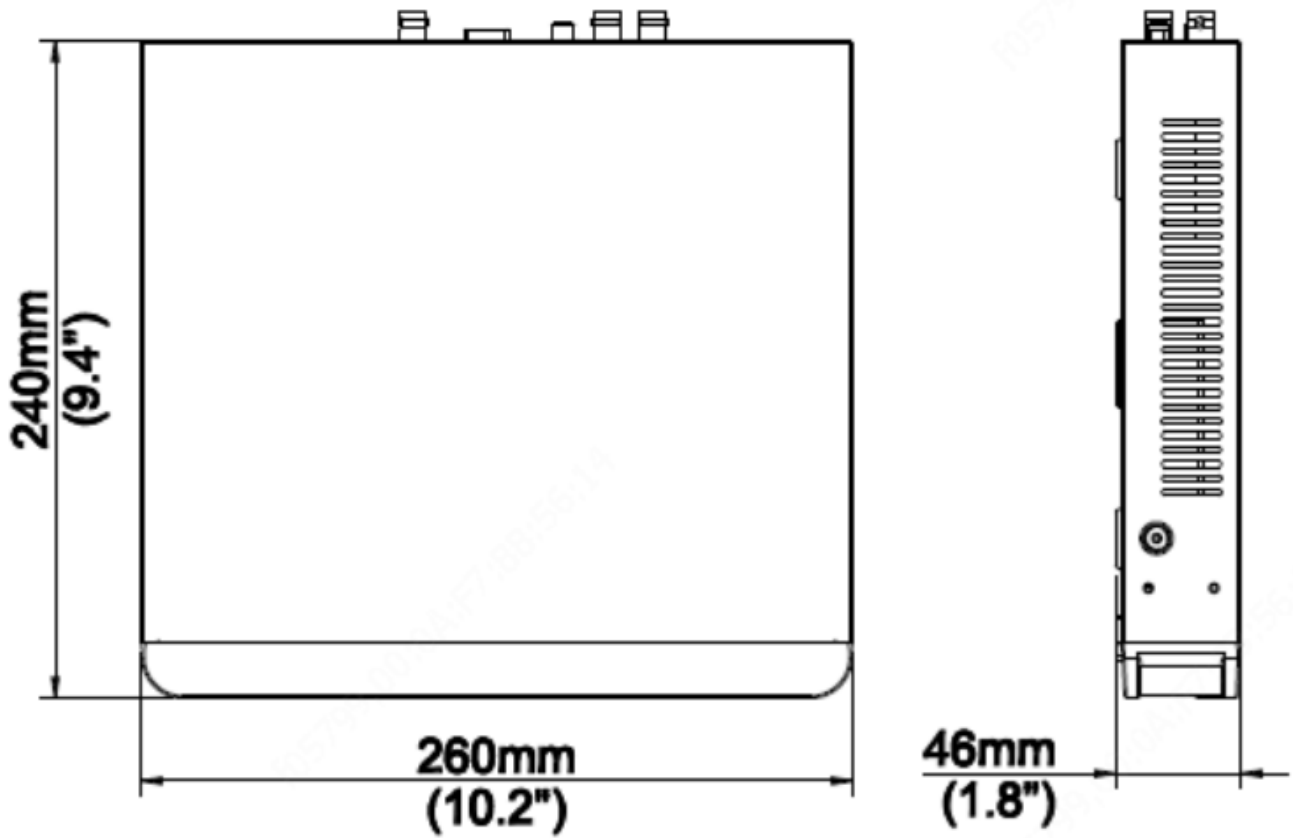

Rear Panel

