

Network Cabinet

HYU-NE-NCS29001

Main material

All is made of high-quality SPCC Cold Rolled Steel

Thickness:

Frame: 1.5mm

Square-hole post: 1.5-2.0mm

Side door: 1.0mm

Shelf board: 1.2mm

Tempered glass: 4.0mm



Features

- **Easy installation and maintenance**

The removable mesh front and single and double curved opened rear doors mean the cabinet is easy to install and maintain. The single or double leaf side door options can also be opened independently.

- **High Stability**

The cabinet can be fitted with castor wheels and supporting feet if required. The maximum static holding of the rack is 1000kgs.

- **Surface Finish**

The cabinet includes a powder coating surface finish which ensures it remains grease and corrosion free. The surface finish complies with relevant ROHS requirements.

- **Multiple Choice**


Different heights can be chosen based the capacity of equipment, and mounting base is optional, to reach the requirements of fixed cabinet, bottom line, cold wind below the bottom, dust rodent.

- **Appearance**

Elegant design, exquisite workmanship, precise dimensions, this product can be placed in the engine room and the office, make your office space looks modern and contemporary.

Structure Diagram

Product Standard Configuration

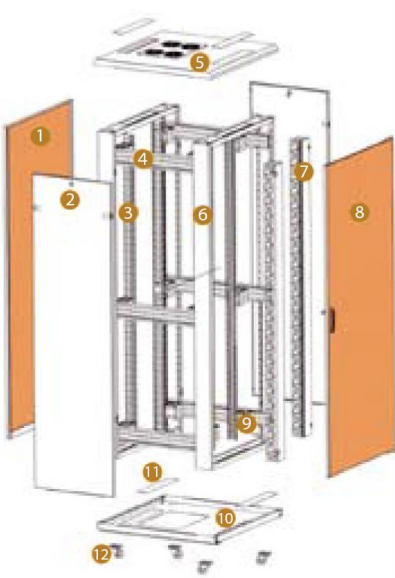

Model	HYU-NE-NCS29001				
S/N	Specification	Qty	Material	Surface Finish	Remark
1	Rear door	1	----	----	See front & rear door type
2	Side panel	2	SPCC t1.0	Powder coated	Small round lock
3	19" rails	4	SPCC t2.0	Powder Coated	
4	Mounting angle	4/6	SPCC t1.2	Powder Coated	6pcs for over 33U
5	Top cover	1	SPCC t1.2	Powder Coated	
6	Frame	2	SPCC t1.5	Powder Coated	
7	Cable management slot	2	SPCC t1.0	Powder Coated	Only used for 800 width cabinet
8	Front door	1	----	----	See front & rear door type
9	Mounting spacer	8/12	SPCC t1.2	Powder Coated	Only used for 800 width cabinet: 6pcs for over 33U
10	Bottom	1	SPCC t1.2	Powder Coated	
11	Cable entry panel	4	SPCC t1.2	Powder Coated	
12	2" heavy duty castor	4	----	----	----
Hardware kits with cabinet					
A	M12 adjustable feet	4	Steel	Nickel-plated	Height: 100MM
B	M6 screw& nuts	20/40	Steel	Nickel-plated	40pcs for over 33U
C	Trox tooling	1	Steel	----	----

Specification

Model	Capacity (U)	Size (mm)			CKD Packing parts
		Width	Depth	Height	
HYU-NE-NCS29001	29	600	800	1400	3

Front & Rear door type



Front & rear door

- Tempered glass door.
- Small lock / Long-handled lock
- Reversible right or left handed doors.
- Turning angle is over 180 degrees.
- Material: Sheet steel and 4MM safety glass
- Surface Finish: Powder coated