

Network Video Recorder HYU-CC-RN1216P001




Key Features

- Support Ultra 265/H.265/H.264 video formats
- 16-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Plug & play with 8/16 independent PoE network interfaces
- Support HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 2 SATA HDD, up to 10 TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

| | |
|---------------------------|---|
| Model | HYU-CC-RN1216P001 |
| Video/Audio Input | |
| IP Video Input | 16-ch |
| Two-way Audio Input | 1-ch, RCA |
| Network | |
| Incoming Bandwidth | 160Mbps |
| Outgoing Bandwidth | 96Mbps |
| Remote Users | 128 |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI: 4K (3840x2160@30), 4K (3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Synchronous Playback | 16-ch |
| Audio Output | 1-ch, RCA |
| Corridor Mode Screen | 3/4/5/7/9/10/12/16 |
| Decoding | |
| Decoding format | Ultra 265/H.265/H.264 |
| Liveview/Playback | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1 |
| PoE | |
| Interface | 8 RJ-45 10M/100M self-adaptive Ethernet Interface |
| Max Power | Max 30W for single port Max 130W in total |
| Supported Standard | IEEE 802.3at, IEEE 802.3af |
| Hard Disk | |
| SATA | 2 SATA interface |
| Capacity | up to 10TB for each disk |
| External Interface | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0 |
| Alarm In | 4-ch |
| Alarm Out | 1-ch |
| General | |
| Power Supply | 220V DC Power Consumption: ≤9 W (without HDD) |
| Dimensions (W×D×H) | 380mm ×315mm × 53mm (15.0" × 12.4" ×2.1") |
| Weight (without HDD) | 2.4kg (5.29lb) |
| Working Environment | -10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |

Dimensions

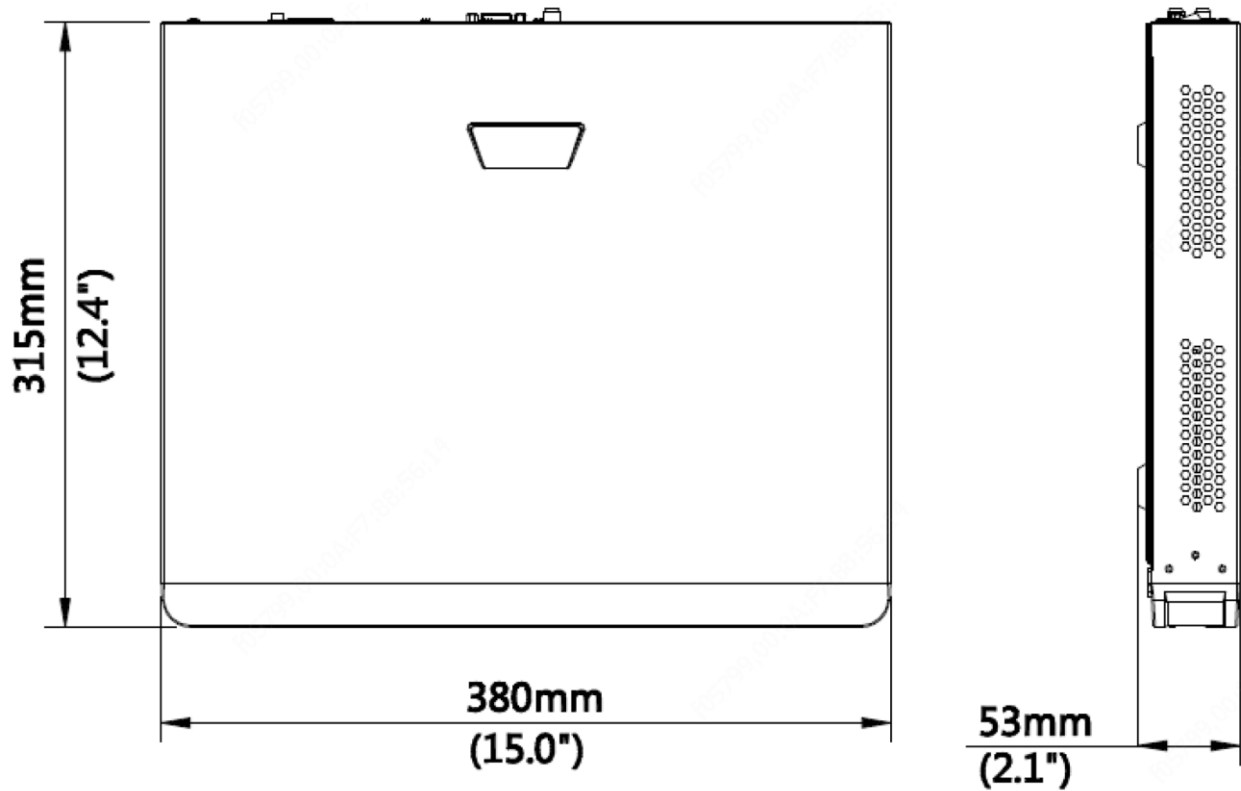

Rear Panel

