

2MP 24/7 Full Colour HD Fixed Turret Camera HYU-CC-CHDF12002-C




Key Features

- 2MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 full-color imaging
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages


Specifications

Model	HYU-CC-CHDF12002-C
Sensor	
Pixel	2MP
Size	1/3"
Minimum illumination	0.02 lux (F1.6, AGC ON) 0.00 lux (white light on)
Lens	
Lens Type	2.8mm
Lens Mount	M12
Angle of View	H: 100.9° ; V: 56.5° ; D: 121.8°
Illuminator	
Illuminator	One white-light illuminator
Illuminator Distance	20m
Lifetime	≥60,000 hours
Video	
Resolution	1080P: 1920(H)×1080(V) 720P: 1280(H) ×720(V)
Frame Rate	TVI/AHD/CVI: 1080P@30fps, 1080P@25fps; 720P@30fps, 720P@25fps CVBS: PAL, NTSC
Shutter time	PAL: 1/25s-1/50000s NTSC: 1/30s-1/50000s
Image	
Exposure mode	4 modes: Global (default), BLC, HLC, DWDR
Day/Night	24/7 full-color imaging
Digital noise reduction	2D/3D
White balance	Two modes: Auto (default), Manual
WDR	DWDR
Flip	Supports 180° horizontal flip, 180° vertical flip
Interface	
Power	5.5mm power interface
Video output	BNC, supports TVI/AHD/CVI/CVBS
Operating environment	
Temperature	-30°C to 60°C (-22°F to 140°F)
Humidity	≤95% (RH, non-condensing)
Surge protection	4KV
Ingress protection	IP67
General	
Power	DC 12V (±25%), with reverse polarity protection and surge protection, Max 2.4W
Mount	Surface mount (default), optional backbox, wall mount bracket
Dimensions	Φ118mm*96mm (diameter*height)
Material	Plastic
Weight	205g (0.452lb)

Dimensions

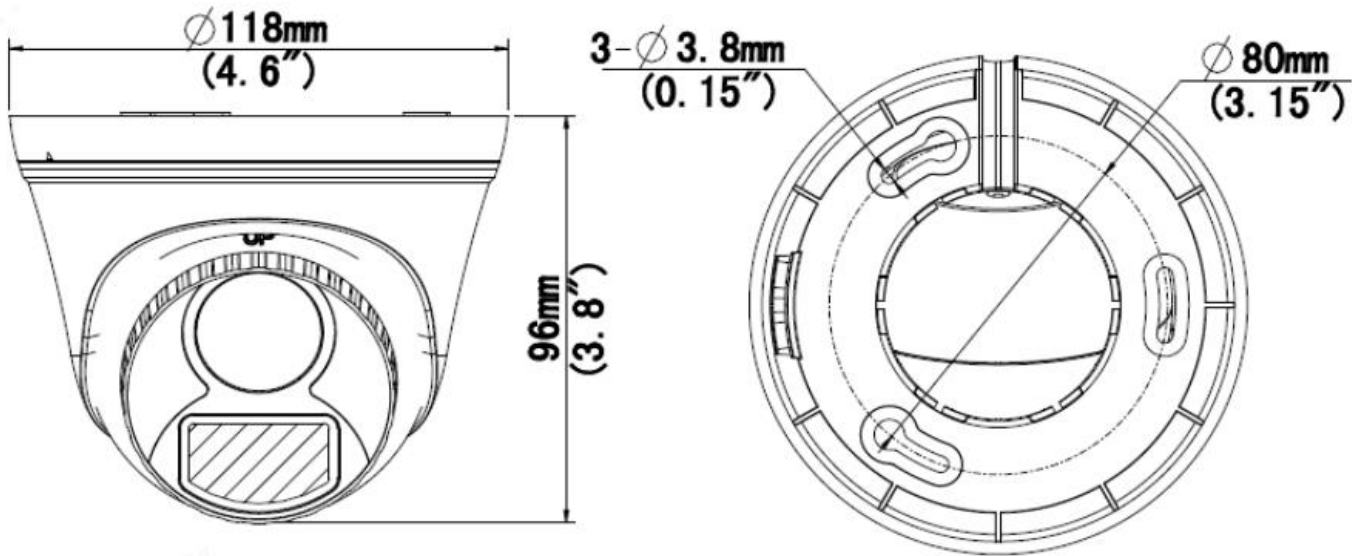

Accessories

Accessory Model	Image	Remarks
HYU-CC-AWM03D		Fixed mini dome/plastic turret camera wall mount bracket - 126.42mm*125.57mm*183.37mm, sold separately