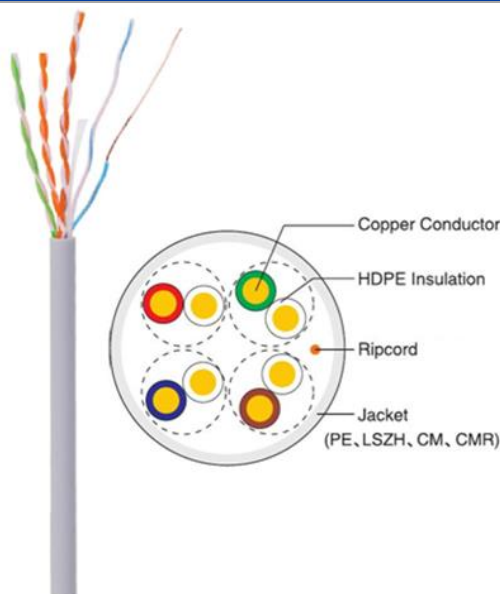


UTP Category 5E Cables

HYU-CAB-UC5LSZH

Model				HYU-CAB-UC5LSZH					
Product specification		HSYV-5e 4×2×0.45							
Test Standard		ISO/IEC11801, TIA-568-C.2, IEC61156-6							
Conductor		Material		Solid-Bare Copper					
		AWG		25					
		Nom.O.D.(mm)		0.45±0.005 mm					
		DC resistance		≤115 Ω/km					
Insulation		Material		HDPE					
		Thickness		0.17±0.01 mm					
		Diameter		0.81±0.05 mm					
		Color		Blue/White- Blue					
				Orange /White-Orange		Brown/White-Brown			
Pitch		Offset pitch		≤25 mm					
		Cable pitch		≤140 mm					
Sheath		Material		PVC (complies RoHS/REACH)					
		External O.D.		4.7±0.3 mm					
		Color		Gray (RAL7046)					
		Tensile strength		>13.5 Mpa					
		Thickness		0.55±0.05 mm					
Surface Printing		Letter height		3.0±0.3 mm					
		Color		Black					
		Print error & Space		1±0.005 m					
		Case number		Yes					
Packing		Packing		Carton					
		Once packing dimension		340mm*220mm*340mm					
		Twice packing dimension		360mm*470mm*360mm					
		Twice packing quantity		2 cases					
Packing length		305±1 m							
Rip-cord		Yes							
Ambient temperature		-20°C ~ 60°C							