

10/100/1000M 26-Port Network Switch

HYU-NE-SW-U24F001



Key Features


- 24*10/100/1000Mbps auto-sensing RJ45 ports + 2*Gigabit SFP Fiber ports, auto MDI/MDIX
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z
- 26*Link/Act LEDs, showing the connection status in real time
- Support 10/100/1000M auto-negotiation for full duplex and half duplex
- Store and forwarding mode
- Support MAC self learning and updating
- Support connection with IP Cameras and wireless AP
- Plug and play, no need more configuration
- Support desktop/wall mounted installation
- Low power consumption design. Energy-saving and green. Max total power consumption < 20W

Specification

Model	HYU-NE-SW-U24F001
Product Name	26-Port 10/100/1000M Network Switch
Model	HYU-NE-SW-U24F001
Interface	24*10/100/1000Mbps auto-sensing RJ45 ports + 2*Gigabit SFP Fiber ports (Auto MDI/MDIX)
Network Media	10Base-T: Cat.3/4/5 (≤100m)
	100BASE-TX: Cat.5/Above (≤100m)
	1000BASE-TX: UTP Cat.5e/Above (≤100m)
Forwarding Mode	Store-and-Forward
Forwarding Rate	38.69Mpps
Back-bound Bandwidth	52Gbps
Buffer Memory	4.1M
MAC Address Table	8K
Standard Protocol	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z
Access Control	CDMA/CD
LED Indicator	1*power LED, 26*Link/Act LEDs
Power Consumption	Max power consumption <20W
Power Input	AC: 100 ~ 240V; 50-60Hz, 1A Built-in power supply (DC12V/2A)
Dimension	312*178*44mm (L*W*H)
Working Environment	Working Temperature: -20°C ~ 55°C
	Storage Temperature: -40°C ~ 70°C
	Working Humidity: 10% ~ 90% Non-condensing
	Storage Humidity 5% ~ 90% RH (non-condensing)
Certification	CE, FCC, RoHS
Packing List	1*Fast User Guide & 1*Warranty Card
	1*26-Port Network Switch
	1*AC Power Cable
	1*Mounting Kits
Warranty	1 year

Dimensions

- A. 24*LINK/ACT LED Indicator for RJ45 Port
- B. PWR LED Indicator
- C. 2*LINK/ACT LED Indicator for SFP Port
- D. 24*10/100/1000M RJ45 Ports
- E. 2*Gigabit Uplink SFP Fiber Ports

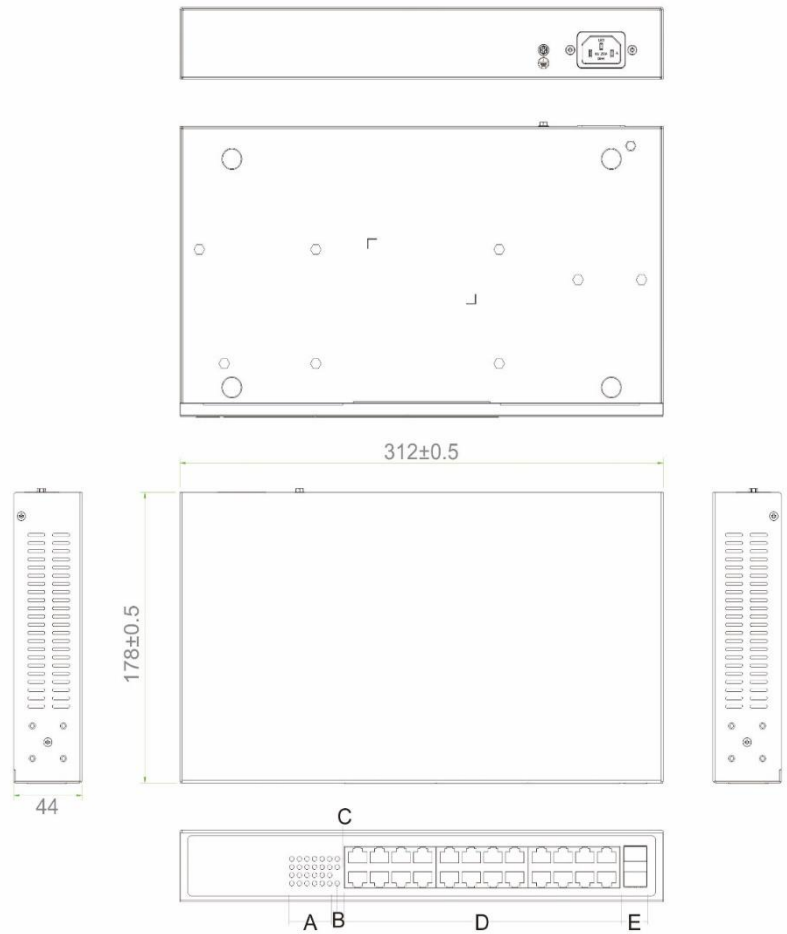

Application

