

# 10/100/1000M 8-Port Unmanaged Network Switch

## HYU-NE-SW-U8001




## Key Features

- 8\*10/100/1000Mbps auto-sensing RJ45 ports, auto MDI/MDIX.
- Gigabit non-blocking wire-speed forwarding, keeps network fluent.
- Full duplex and half duplex, preventing frame loss from port blocking.
- Auto-detecting of parallel / cross line. Simplify the network structure and maintenance.
- Store and forwarding mode.
- Support MAC self learning and updating.
- Support connection with IP Cameras and wireless AP.
- Plug and play, no need more configuration.
- Support desktop/wall mounted installation.
- Low power consumption design. Energy-saving and green. Max total power consumption < 6W.

### Specification

Model		HYU-NE-SW-U8001
Product Name	8-Port 10/100/1000M Network Switch	
Model	HYU-NE-SW-U8001	
Interface	8*10/100/1000Mbps auto-sensing RJ45 ports (Auto MDI/MDIX)	
Network Media	10Base-T: Cat.3/4/5 (≤100m)	
	100BASE-TX: Cat.5/Above (≤100m)	
	1000BASE-TX: UTP Cat.5e/Above (≤100m)	
Forwarding Mode	Store-and-Forward	
Forwarding Rate	11.9Mpps	
Back-bound Bandwidth	16Gbps	
Buffer Memory	4M	
MAC Address Table	8K	
Standard Protocol	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z	
Access Control	CDMA/CD	
LED Indicator	1*power LED, 8*Link/Act LEDs	
Power Consumption	Standby State: 0.7W. Max power consumption <6W	
Adapter	Input	AC: 100 ~ 240V; 50-60Hz, 0.5A
	Output	9.0V 1.0A (External power adaptor)
Dimension	142 * 78.8 * 27mm (L*W*H)	
Working Environment	Working Temperature: -20°C ~ 55°C	
	Storage Temperature: -40°C ~ 70°C	
	Working Humidity: 10% ~ 90% Non-condensing	
	Storage Humidity 5% ~ 90% RH (non-condensing)	
Certification	CE, FCC, RoHS	
Packing List	1*Fast User Guide & 1*Warranty Card	
	1*8-Port Network Switch	
	1*Power Adaptor (9V/1A)	
Warranty	1 year	

## Dimension

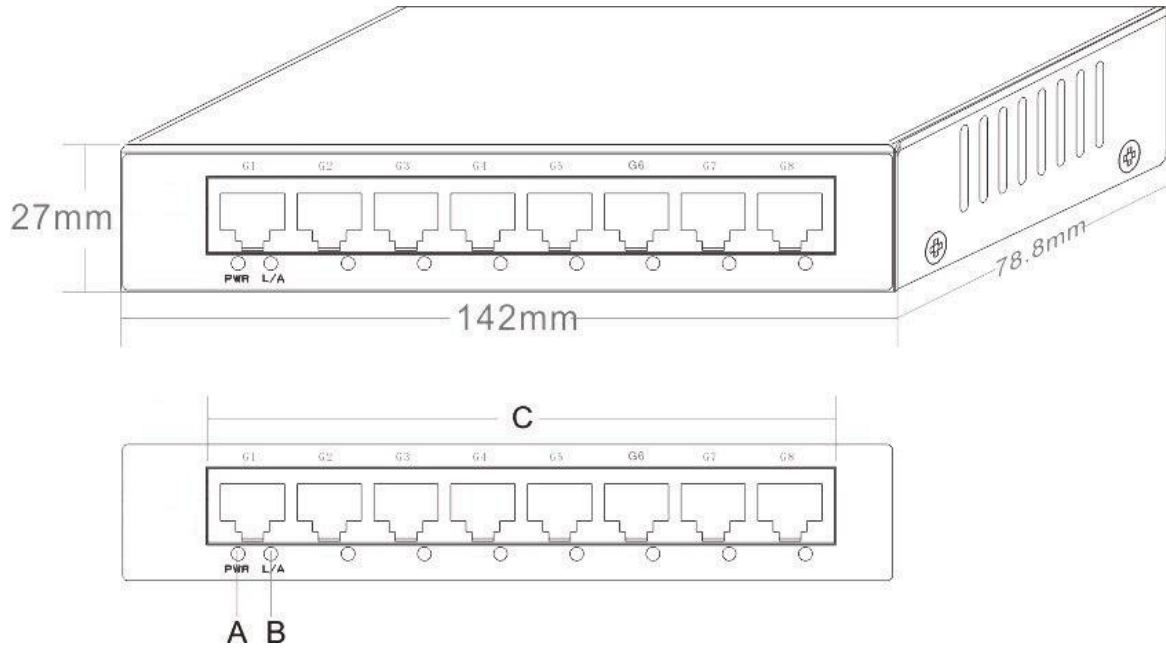

A. PWR Led Indicator    B. LINK/ACT Led Indicator    C. 8\*10/100/100M RJ45 Ports

## Application

