

# NXG-208N

## xGenConnect 8 zone expander with zone anti-mask support

### Increasing zone capability

---

The NXG-208N adds by default 8 supervised hardwired zone inputs to the xGenConnect range of panels.

### Installation


---

The module comes with a set of card slides allowing the module to be slided into the xGenConnect control panel enclosure.

### Programming

---

The NXG-208N does not need specific programming. Enrolling the module and programming the zones is done from the control panel. The firmware of the module is upgradeable remotely via DLX900 or locally using the USB flash device.

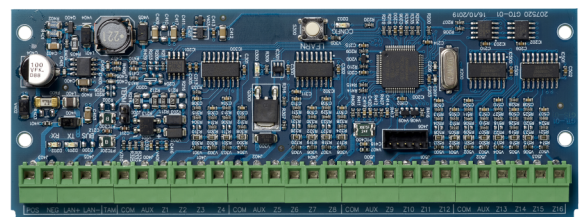

### Details

---

- 8 zone expander for xGenConnect
- Triple end-of-line resistor support (anti-mask)
- Separate box tamper input
- "NetworX" form factor
- Shock sensor analyzation support
- Firmware upgrade via USBUP-EUR flash tool or via DLX900 over the network
- EN50131-3 CLASS II GRADE 2, INCERT T031

# NXG-208N

## xGenConnect 8 zone expander with zone anti-mask support

### Technical specifications

---

#### System

---

|              |             |
|--------------|-------------|
| Product line | xGenConnect |
| Kit          | No          |

---

#### Inputs

---

|                            |   |
|----------------------------|---|
| Onboard inputs             | 8   |
| End-of-line resistor value | 3.3K - 6.6K; 4.7K - 9.4K - 19.4K; 4.1K - 8.2K - 16.4K |
| Tamper input               | Normally closed                                       |

---

#### Communication

---

|              |       |
|--------------|-------|
| Databus type | RS485 |
|--------------|-------|

---

#### Electrical

---

|                     |                                    |
|---------------------|------------------------------------|
| Operating voltage   | 12 to 13.5 VDC (provided by panel) |
| Current consumption | 30 mA (typical)                    |

---

#### Physical

---

|                     |             |
|---------------------|-------------|
| Physical dimensions | 153 x 57 mm |
| Shipping weight     | 60 g        |

---

#### Environmental

---

|                       |                   |
|-----------------------|-------------------|
| Operating temperature | 0 to +49°C        |
| Storage temperature   | -34 to 60°C       |
| Relative humidity     | 85% noncondensing |

---

#### Regulatory

---

|               |                         |
|---------------|-------------------------|
| EN50131 Grade | Grade 2                 |
| Compliance    | CE                      |
| Certification | EN50131 Grade 2, INCERT |

---



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 26 April 2024 - 16:42