

## Network Video Recorder HYU-CC-RN314002



### Key Features


- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 8TB
- Support cloud upgrade

### Specifications

|  |   |
|--|---|
| Model                                      | HYU-CC-RN314002   |
| <b>Video/Audio Input</b>                   |   |
| IP Video Input                             | 4-ch  |
| <b>Network</b>                             |   |
| Incoming Bandwidth                         | 64Mbps  |
| Outgoing Bandwidth                         | 48Mbps  |
| Remote Users                               | 128   |
| Protocols                                  | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP   |
| <b>Video/Audio Output</b>                  |   |
| HDMI/VGA Output                            | HDMI:<br>3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz<br>VGA:<br>1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution                       | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF  |
| Synchronous Playback                       | 4-ch  |
| Audio Output                               | 1-ch, 3.5mm   |
| Audio Compression                          | G.711A, G.711U  |
| Liveview display                           | 1/4   |
| Corridor Mode Screen                       | 3/4   |
| <b>Decoding</b>                            |   |
| Decoding format                            | Ultra 265/H.265/H.264   |
| Liveview/Playback                          | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF  |
| Capability                                 | 1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30   |
| <b>Snapshot</b>                            |   |
| FTP/Schedule/Event Snapshot                | 1-ch snapshot, up to D1 resolution  |
| <b>Hard Disk</b>                           |   |
| SATA                                       | 1 SATA interface  |
| Capacity                                   | Up to 8TB for each disk<br>(The maximum HDD capacity varies with environment temperature)   |
| <b>Smart</b>                               |   |
| VCA Detection by camera                    | Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Audio Detection  |
| VCA Search                                 | Behavior Search   |
| Smart Intrusion Prevention (SIP) by Camera | 4-ch(supports channel 1-4; Alarm only, no image)  |
| <b>General Alarm</b>                       |   |
| General Alarm                              | Motion, Tampering, Human Body Detection, Video Loss, Alarm Input  |
| Alert Alarm                                | IP Conflict, Network Disconnected, Disk Offline , Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal   |
| <b>External Interface</b>                  |   |
| Network Interface                          | 1 RJ45 10M/100M self-adaptive Ethernet Interface  |

|                      |   |
|----------------------|---|
| USB Interface        | Rear panel: 2 x USB2.0  |
| Alarm In             | N/A   |
| Alarm Out            | N/A   |
| RS232                | N/A   |
| RS485                | N/A   |
| <b>General</b>       |   |
| Power Supply         | 12V DC<br>Power Consumption: ≤5 W (without HDD)                     |
| Dimensions (WxDxH)   | 260mm × 240mm × 46mm (10.2"×9.4"×1.8 ")                             |
| Weight (without HDD) | ≤0.98kg (2.16 lb)   |
| Working Environment  | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |

### Dimensions

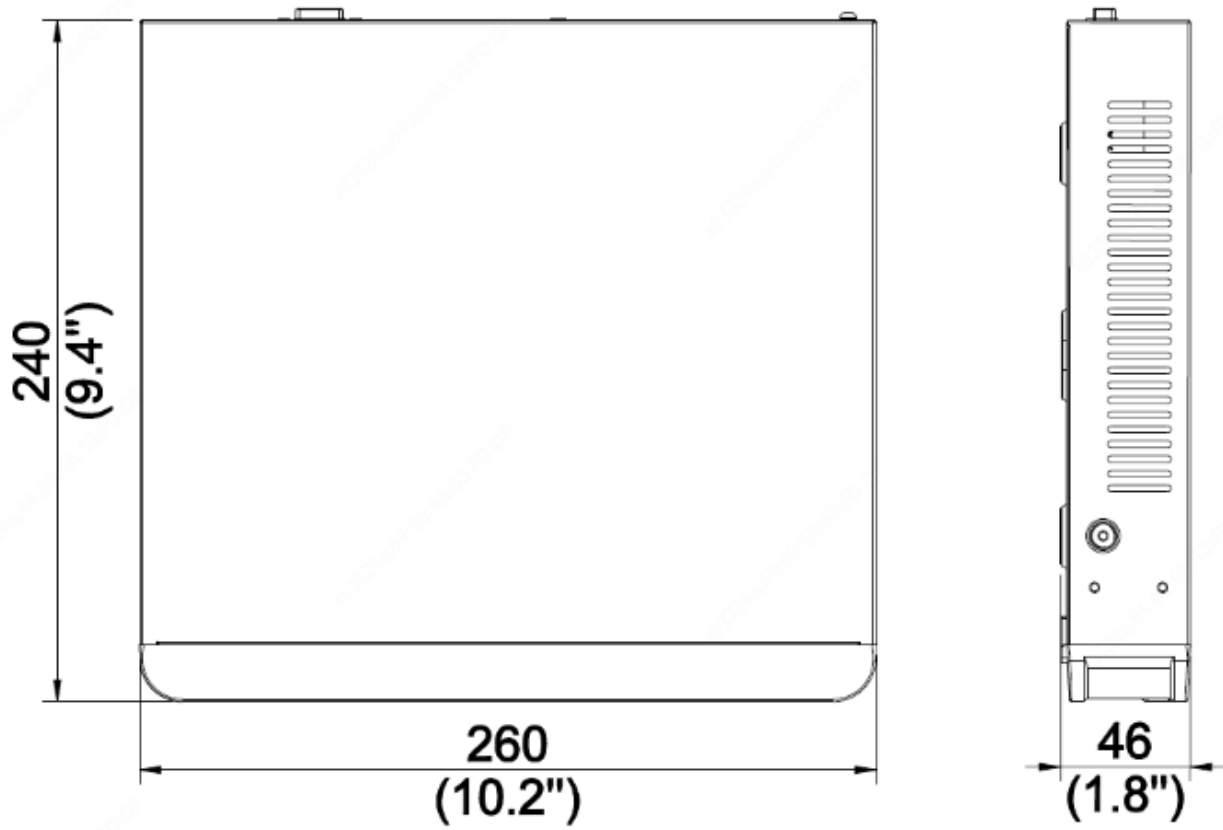

### Rear Panel

