

NETWORK VIDEO RECORDER

HYU-CC-RN3224001



Key Features


- Support H.265/H.264 video formats
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Up to 8MP resolution for recording long transmission distance over coax cable
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable

Specifications

Model	HYU-CC-RN3224001
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch (only IP up to 24ch)
Supported Analog Camera Types	Support AHD input: 8MP@15fps(channel1-channel4) 5MP@20fps 4MP@30fps 3MP@30fps (channel1 -channel4) 1080P@30fps 720P@60fps Support TVI input: 8MP@15fps(channel1-channel4) 5MP@20fps 4MP@30fps 3MP@20fps (channel1 - channel4) 1080P@30fps 720 P@60fps Support CVI input: 8MP@15fps(channel1-channel4) 4MP@30fps 1080P@30fps 720P@60fps Support CVBS input
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Channel Associated Audio	1-ch, RCA
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Encoding	
Frame Rate	Main stream: 8MP Lite@8fps (channel1-channel4) 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps (channel1 - channel4) 2MP@15fps 720P@30fps Sub stream: D1@30fps (Max)

Decoding	
Decoding format	H.265/H.264
Live View/ Playback	12MP/8MP/5MP/4MP/3MP/1080P/960P/720P/960H/4CIF/CIF/QCIF
Capability	2 x 4K@30, 2 x 6MP@30, 3 x 5MP@30, 4 x 4MP@30, 4 x 3MP@30, 6 x 3MP@25, 8 x 1080p@30, 16 x 720p@30
Hard Disk	
SATA	2 SATA interface
Capacity	Up to 10TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1 x USB2.0
Serial Interface	1 x RS485
Alarm In	-
Alarm Out	-
General	
Power Supply	12V DC Power Consumption: ≤12 W (without HDD)
Dimensions (W×D×H)	380mm × 315mm × 49mm (15" × 12.4" × 1.9")
Weight (without HDD)	≤1.9 Kg (4.19lb)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)

Dimensions

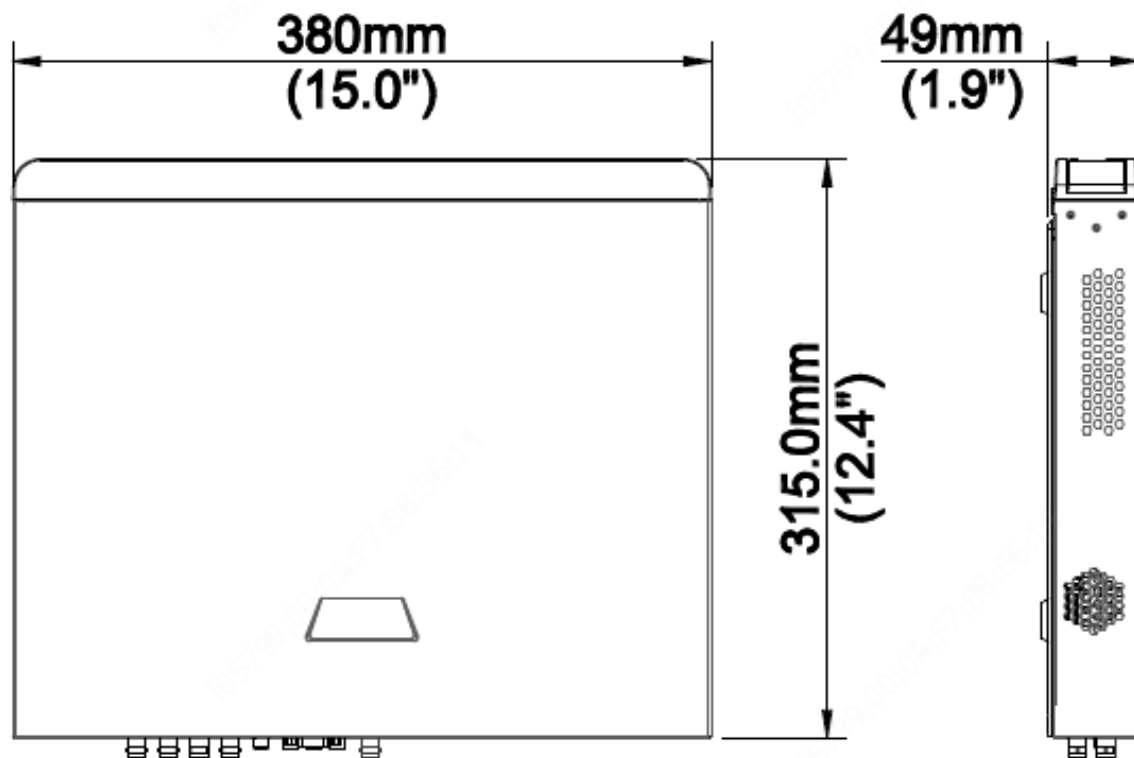

Rear Panel

