


2MP HD Fixed IR Bullet Network Camera HYU-CC-CIBF12001



Key Features

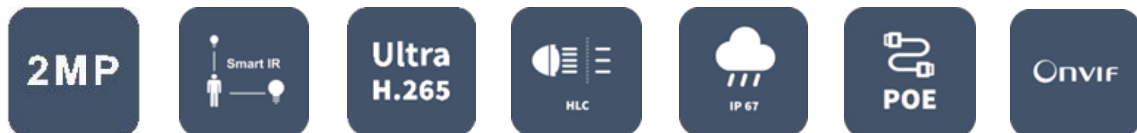

- High quality image with 2MP, 1/2.7"CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Optical glass window with higher light transmittance
- ROI (Region of Interest)
- Smart IR, up to 30m (98ft) IR distance
- IP67 protection
- Support PoE power supply
- ONVIF Conformance

Specifications

Model	HYU-CC-CIBF12001			
Camera				
Sensor	1/2.7", 2.0 megapixel, progressive scan, CMOS			
Minimum Illumination	Colour: 0.02Lux (F2.0, AGC ON) 0 Lux with IR			
Day/Night	IR-cut filter with auto switch (ICR)			
Shutter	Auto/Manual, 1 ~1/100000s			
Adjustment Angle	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°			
S/N	>52dB			
Lens				
Lens Type	4.0mm @2.0, Fixed-focal			
Angle of View (H)	86.5°			
Angle of View (V)	44.1°			
Angle of View (O)	106.4°			
DORI				
Resolution	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	66.7	26.7	13.3	6.7
Illuminator				
IR Range	Up to 30m (98ft) IR range			
Wavelength	850nm			
IR On/Off Control	Auto/Manual			
Video				
Video Compression	Ultra 265, H.265, H.264, MJPEG			
H.264 code profile	Baseline profile, Main profile			
Frame Rate	Main Stream: 1080P (1920*1080), Max 30fps Sub Stream: 720P (1280*720), Max 30fps; Third Stream: CIF (352*288), Max 30fps			
Video Bit Rate	128kbps ~ 16Mbps			
OSD	Up to 4 OSDs			
Privacy Mask	Up to 8 areas			
ROI	Up to 2 areas			
Motion Detection	Up to 4 areas			
Image				
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2			
Digital Noise Reduction	2D/3D DNR			
Smart IR	Supported			
Flip	Normal/Vertical/Horizontal/1800			
Dewarping	Supported			
HLC	Supported			
BLC	Supported			

Network

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
Compatible Integration	ONVIF (Profile S, Profile T), API
Client	GuardStation, Guardview


Interface

Network	1 * RJ45 10M/100M Base-TX Ethernet
---------	------------------------------------

General

Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 4.5W
Dimensions (L x W x H)	167.3 x 62.9 x 62.7mm
Weight	0.45kg
Material	Metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	2KV
Reset Button	Supported
Ingress Protection	IP67

Dimensions

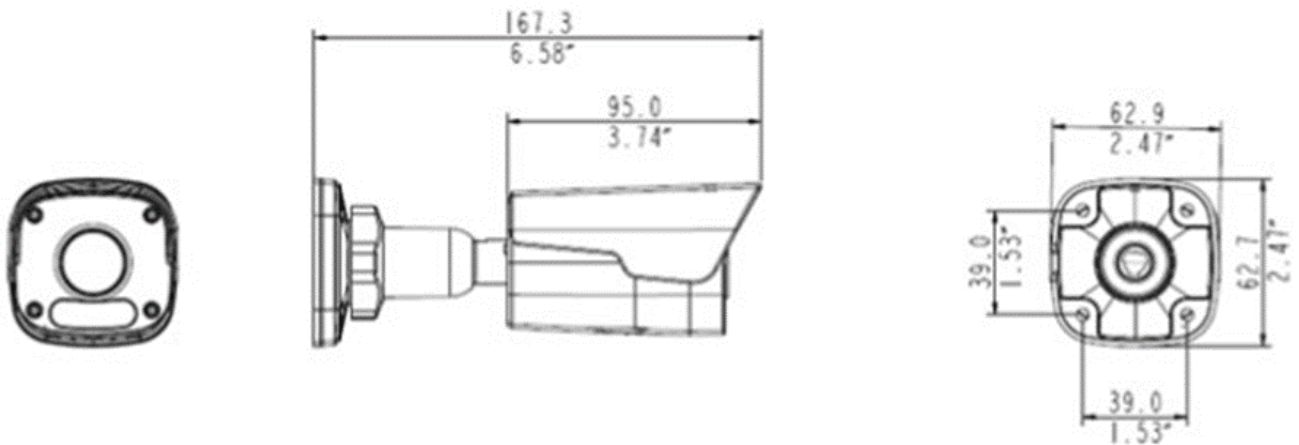

Accessories

HYU-CC-AUP06B



HYU-CC-AJB05A

