

HYUNDAI
ELECTRONICS

24" Professional LED Monitor


HYU-CC-MM24002

USER MANUAL



Monitor Quick Operation Guide

● Key Function Description

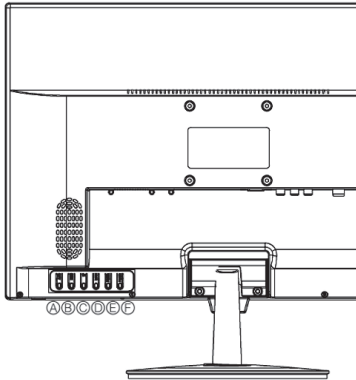

- Ⓐ signal source
- Ⓑ menu key
- Ⓒ + key
- Ⓓ - key
- Ⓔ confirm key
- Ⓕ power indicator

● Operating Instructions

1. Power on automatically

2. Channel Selection: press key A, press key B to select signal channel, and then press key E to confirm, Finally press key A to exit


3. Clmage effect design: Press B to enter the menu, press key C to enter the main toolbar and move to the right. Press key D to enter the main toolbar and move to the left, press A to enter the toolbar sub-menu, press C (move right)/D (move left) to enter the third-level sub-menu, after the selection, press B to exit

● Basic Parameters

definition	1920*1080
Screen type	LED
aspect ratio	16:9/16:10
brightness	250-300 cd/m ²
contrast	1000-3000:1
input signal	HDMI VGA USB AV
language	Chinese/English
power	20W~36W
power frequency	AC110V/220V/50Hz/60Hz
long-term working environment	0-30°c

(*The specific parameters are subject to the actual model.)

● Interface Function Diagram

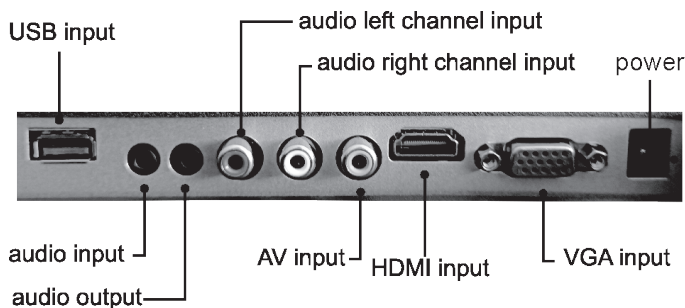

Mark "only for safe use in non tropical climate"



Mark "only for safe use in areas below 2000m above sea level"

HYUNDAI



For Inquiries, Please Contact:

**Security Shop
Vladimira Nazora 1
11077 Novi Beograd, Serbia
Tel: +381 11 318 68 68
office@securityshop.rs**

Imported/Distributed by Security Shop doo
Licensed by Hyundai Corporation Holdings, Korea
Delivery and After Service shall only be covered within Serbia