

Unmanaged PoE switch

HYU-NE-SW-U8PG001

USER MANUAL

HYU-NE-SW-U8PG001



Packing List

- 1 PoE switch
- 1 Power Cord / Adapter
- 1 Mounting Kit
- 1 User Guide

Product Introduction

The HYU-NE-SW-U8PG001 series is a unmanaged PoE switch independently developed by . It has 8*10/100M PoE ports and 2*10/100/1000M RJ45 ports . Port 1-8 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 110W (at-250W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP, visual intelligent building intercom through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, factory dormitory and small and medium-sized enterprises.

Feature

Comply to IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3af, IEEE802.3at standards;

Support 10/100 or 10/100/1000M auto-sensing RJ45 ports

All ports support auto-flip (Auto MDI/MDIX);

Each PoE port can provide power up to 15.4W (af) or 30W (at);

Supply power for powered devices compatible with IEEE802.3af/at;

Support IEEE802.3x full duplex flow control and duplex backpressure flow control;


Switching Capacity :11.8G

MAC address:2K

Its 3.5KV network port surge protection can adapt to harsh outdoor environment;

Under the temperature of -20 ~ 55°C.

Technical Structure and Port Description

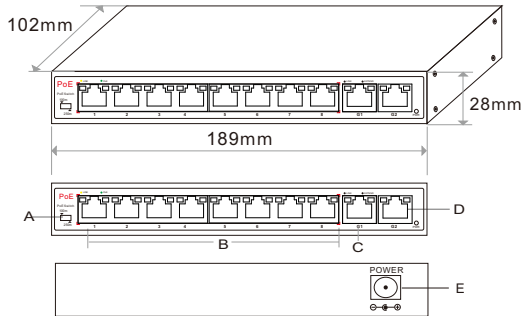

- A. Multi-functional switch 100/250m
- B. 8*PoE Port
- C. 10/100/1000M uplink RJ45 Port
- D. 10/100/1000M uplink SFP Port
- E. Power Input Port DC48V

Indicator description:

Indicator	Status	Description
Power Indicator: PWR	Green LED ON	Normal
	OFF	Power OFF
PoE Indicator: PoE	Green LED ON	Connected PD, working properly
	Green LED Blink	Short circuit or current overload
	OFF	No Connected PD or Power OFF
100/1000M Indicator: Act/Link	Yellow LED Blink	Data transmission properly
	Yellow LED ON	Network link is connected normally
	OFF	No connected network device
SPD Indicator: 1000M	Green LED ON	Connected with 1000Mbps network device
	OFF	Connected with 10/100Mbps network device

⚠ Note : Please confirm that all the PD devices are complying with IEEE802.3af standard.

PoE Priority: This function will protect the switch when it is overloaded, if all devices consumption are higher than specified, switch ports will be sorted by priority, Port 1, Port 2, Port 3, etc. Then the power supply of lowest priority will be turned off.

Power Plug / Adapter: Please only use the included power supply as the switch may be damaged if mismatched power is applied.

PoE Port Indicator Lights: There are indicator lights on the front panel that will show you if the switch is supplying power to a PoE capable device.

Network Traffic Indicator Lights: There are lights on the front panel that will show if your plugged in device is transmitting / receiving network data at an appropriate rate.

Installation guide

Please install with the supporting devices.

Installation

Please confirm the following things before installation:

1. If the POE ports meets the power requirement of the connecting devices.
2. If the POE standard requirements and power supply matches with the power receiving device (1/2+ 3/6-(End -span))
3. .If the output power of the matched power adapter is compatible with the specification in the label of the POE switch

Please install the POE switch according to the following steps:

1. Put the PoE switch on the surface of a large and stable table.
2. Plug the power adapter into the power connector, and then connect the power outlet through the power cord.
3. Connect the network devices to the POE

 switch port with network cable. Note

- 1.Please do not put heavy products on the POE switch, and please ensure good ventilation environment for the POE switch.
- 2.Please cut off the power first before plugging the power adapter.

Power

Connect the power cable, plug it into power socket, turn on the power, then the switch will automatically initialize, and LED lights status will display as following:

1 All lights will flash brightly except for the PoE ports, which means a successful power boot has occurred.

2 Power LED remains lit.

 Note


If initialization is inconsistent with the above, please check the power.

(1/2+ 3/6-(End -span))

3.If the output power of the matched power adapter is compatible with the specification in the label of the POE switch

Please install the POE switch according to the following steps:

Connection Diagram

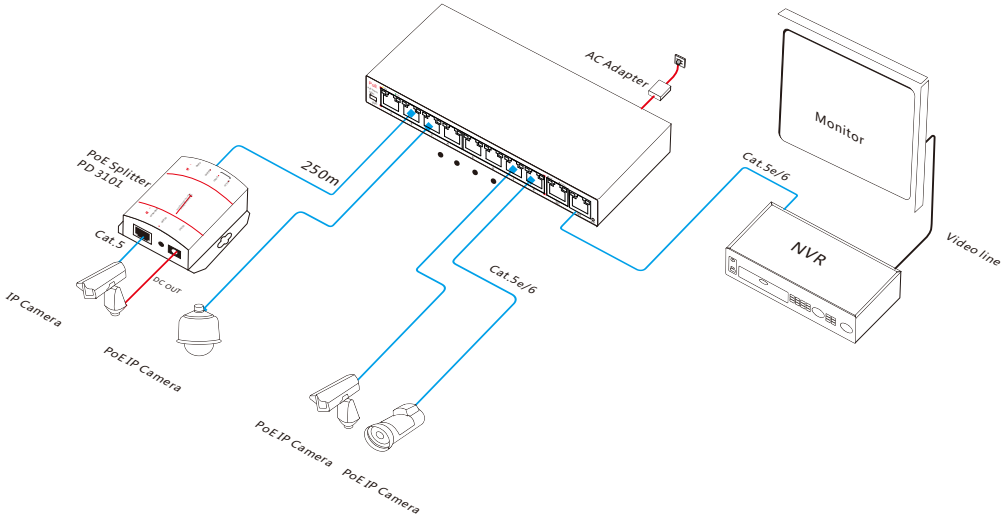

Model Descriptions and Installation

HYU-NE-SW-U8PG001: Unmanaged PoE switch with 8*10/100M PoE port and 2*10/100/1000M uplink RJ45 ports . Port1-8 can support IEEE 802.3af/at PoE international standard, Adjust function switch, 1-8 port VLAN isolation or 10M/250m long distance transmission. External 110W power supply.

For Inquiries, Please Contact:

Security Shop
Vladimira Popovica 6/6/A606
11070 Novi Beograd, Serbia
Tell +381 11 318 68 68
office@securityshop.rs