

TVN-1204C-2T

TruVision NVR 12, 4 channels, 40 Mbps, 2 TB

Reasons for choosing TVN 12

The TVN 12c recorder series offers a full-featured, compact recording solution for IP cameras with a maximum resolution of 8 MP (4K).

The TVN-1204c is a cost-effective, easy-to-use recorder capable of recording up to four IP cameras.

Ease to use


A setup wizard with auto detection of IP cameras guarantees a fast installation of the recorder.

The TVN 12c can be added to the internet without port forwarding or VPN, thanks to the built-in UltraSync connectivity. Showing remote video on mobile applications was never easier.

In combination with dedicated TruVision cameras that can support people and/or vehicle detection, the TVN 12 recorder series can find relevant events faster and without efforts.

Applications

The TVN 12c is the ideal recording solution for small commercial and residential applications, where ease of use and fast deployment time are important.

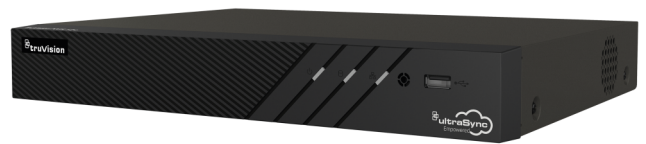

Details

- Linux embedded Plug and Play configuration
- Supports H.264, H.265 and H.265+ encoding, depending on the cameras
- Up to 40 Mbps camera recording bandwidth
- Up to four IP channels with a maximum resolution of 4K (8 MP)
- 2 TB embedded storage
- Real time recording (Up to 4 MP)
- HDMI/VGA monitor output
- TruVision IP camera auto-detection
- IP camera configuration import/export
- UltraSync support for remote access without port forwarding
- Motion detection, VCA, privacy masking and tamper detection
- Dedicated people/vehicle detection in combination with supported cameras
- Third party camera support via ONVIF Profile S or RTSP (custom protocols)
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- TVK-600 IP keypad support
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded video & configuration
- TVRMobile app for iOS and Android for remote viewing
- TruVision Navigator license-free client/host or standalone application support
- External integration through SDK

TVN-1204C-2T

TruVision NVR 12, 4 channels, 40 Mbps, 2 TB

Technical specifications

General

Technology	IP
Operating system	Embedded Linux
Rack mountable	No
Rack stacking size	1 U

Video / audio input

Camera channels	4
IP camera channels	4
Max. bandwidth per channel	16 Mbps
Camera bandwidth	40 Mbps
Audio compression	G.711alaw, G.711ulaw, G.722, G.726
Max. IP audio in	4
Max. analog audio in	1
Supported video compression standards	H.264, H.265, H.265+
Supported video streaming standards	Onvif, RTSP Custom Protocols

Local viewing

HDMI output	1
HDMI version	1.4, 2.0
VGA output	1
Max. local output resolution	4K
Synchronous playback OSD (channels)	Up to 4 (1080P)

Remote viewing

Total available viewing bandwidth	80 Mbps
Max. live viewing streams	128
Max. playback viewing streams	8
Max. simultaneous playback web browser	Up to 8 channels
Reverse playback web browser (channels)	Up to 8
UltraSync support	Yes, embedded
Software compatibility	Advisor Management Software (ATS8600), TruVision Navigator, TVRmobile
Browser compatibility	Google Chrome, Internet Explorer, Mozilla Firefox, Safari

Storage

Storage capacity	2 TB
SATA interfaces	1
Max. capacity per SATA HDD (TB)	8
Maximum recording resolution	4 K
Recording modes	Continuous, Event, Manual
External storage	NAS
Edge failover recording	Yes

Networking

Network interface cards (NIC)	1
NIC type	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Total PoE budget	Max. 50 W
PoE standards supported	PoE-af, PoE-at
Plug & Play PoE support	Yes
DNS support	DDNS, ezDDNS, No-IP
HTTPS support	Yes

External interfaces

USB interface back	1
USB interface front	1
Serial interface	None
Alarm inputs	4
Alarm outputs	1
Max. analog audio outputs	1

Electrical

Power supply type	12 VDC
Power consumption	PoE model: 65 W (without hard disk) Non-PoE model: 10 W (without hard disk)
Power consumption without HDD (W)	≤10 W

Physical

Physical dimensions	320 x 240 x 48 mm (W x D x H) with FP: 315 x 236.5 x 47.5 mm
Net weight	1.1 kg
Colour	Black

Environmental

Operating temperature	-10 to +55°C 14 to 131°F
Relative humidity	10 to 90% noncondensing

Regulatory

Compliance	CE, FCC, RCM, REACH, RoHS, UKCA, UL, WEEE
------------	---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 21 June 2024 - 11:39