HYUNDAI

12 Core In/Outdoor Optical Cable

HYU-CAB-IO12C001


USER MANUAL

HYUNDAI

12 Cores In/Outdoor Optical Cable

HYU-CAB-IO12C001

Product structure diagram

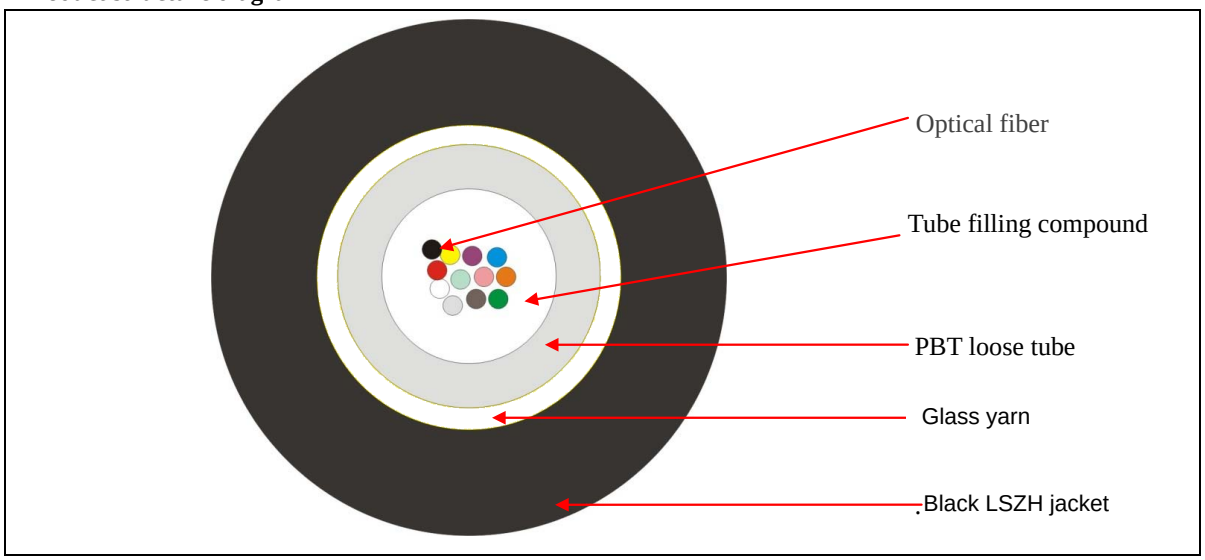

1. Colored fiber
   Coated outside diameter：125.0±0.1um
   Optical fiber diameter：242±7um
   UV color fiber: Standard chromatogram
   -Blue,Orange,Green,Brown,Gray/Slate,White,Red,Black,Yellow,Violet,Rose/Pink,Aqua
2. Tube filling compound(Gel)
3. PBT loose tube
4. Glass yarn
5. Black LSZH jacket　　Outside diameter：　6.0±0.5mm

Parameters of fiber

Optical fiber type	Unit	SM G652	SM G652D	MM 50/125	MM 62.5/125	MM OM3-300
Waveband	nm	1310/1550	1310/1550	850/1300	850/1300	850/1300
Attenuation	dB/km	0.36/0.23	0.36/0.23	3.0/1.0	3.0/1.0	3.0/1.0

Product parameters

Performance	Long-term	Short-term
Max. Tension（N）	300	600
Max. Crushing Resistance(N/100mm^2)	300	600
Min. Bending Radius	30D(Dynamic)	15D(Static)
Storage and operating temperature	－40℃－＋70℃	

Appearance and packaging

1. No damage on the surface; no trachoma.
2. Wooden tray packaging; wood whole seal packaging
3. Segment length: no less than 1000M. The segment length of each tray of the same batch shall be similar as much as possible. Other lengths can be agreed upon through consultation.
4. Report certificate: It includes optical cable inspection number, optical cable type, core number, optical fiber type, length, etc

HYUNDAI

For Inquiries, Please Contact:

Security Shop
Vladimira Popovica 6/6/A606
11070 Novi Beograd, Serbia
Tell +381 11 318 68 68
office@securityshop.rs

Imported/Distributed by Security Shop Doo
Licensed by Hyundai Corporation Holdings, Korea
Delivery and After Service shall only be covered within Serbia